



Verso R 1000 F C5

Nominal air flow according to ErP 2018, m ³ /h	890
Nominal air flow according to ErP 2018, l/s	247
Electric air heater capacity, kW / Δt, °C	3/8,9
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	8,5
Maximal operating current HW, A	4,5
Power supply cable E, mm ²	5x1,5
Power supply cable W, mm ²	3x1,5
Electric power input of the fan drive at maximum flow rate, W	267
Noise power level, L _{WA} , dB(A)	55
Noise pressure level, L _{PA} , dB(A), (3 m)	44
Filters dimensions BxHxL, mm	410x420x46
Supply filter class	ePM1 60 (F7)
Exhaust filter class	ePM10 50 (M5)
Unit dimensions BxHxL, mm	940x480x1360
Panel thickness, mm	50
Maintenance space, mm	400
Unit weight, kg	140

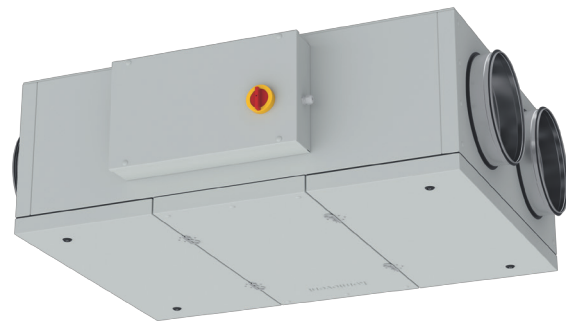

Performance

Verso R 1000 F with standard equipment

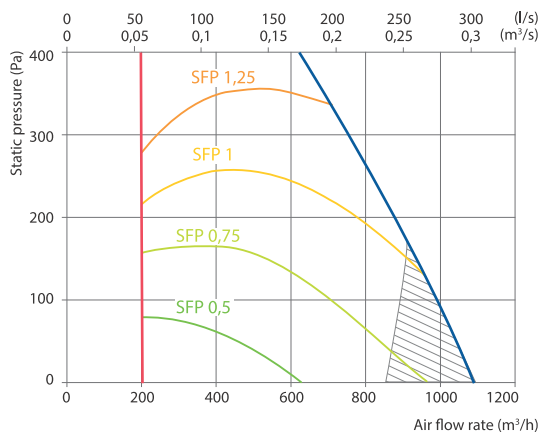

Temperature efficiency

Outside temperature, °C	Winter					Summer		
	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14	15,4	16,3	17,2	18,1	22,5	23,4	24,3

Indoor +22 °C, 20 % RH

Hot water duct air heater *


Water temperature in/out, °C	Winter		
	80/60	70/50	60/40
Capacity, kW	2,4	2,4	2,4
Flow rate, dm ³ /h	106	106	106
Pressure drop, kPa	2,4	2,4	2,4
Temperature in/out, °C	14 / 22,0		
Maximal capacity, kW	9,9	8,0	6,1
Connection, "	½		

* Option


Accessories

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	ODA/EHA AGS-315-100-900-M
	SUP/ETA AGS-315-100-1200-M
Water heater	DH-315
PPU	PPU-HW-3R-15-1,0-W2
Water cooler	DCW-1,2-8
Water heater-cooler	DHCW-315
2-way valve	VVP47.15-2,5+SSF161.05HF
Ducted DX cooler	DCF-1,2-8
Cooling unit for ducted cooler	MOU 24HFN8a+KA8142


Mounting positions



Shown as right (R1) View from inspection side

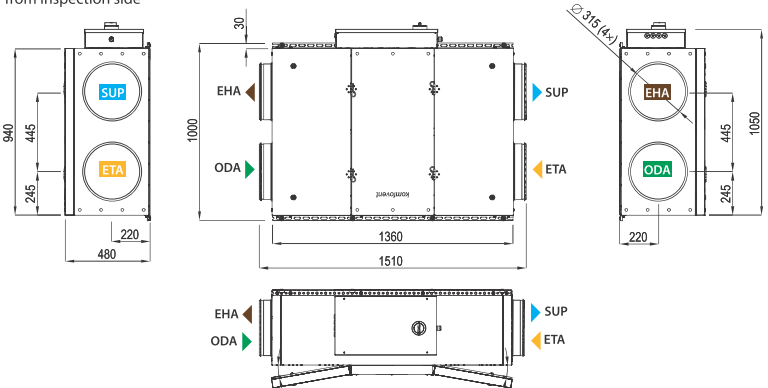

Shown as left (L1)

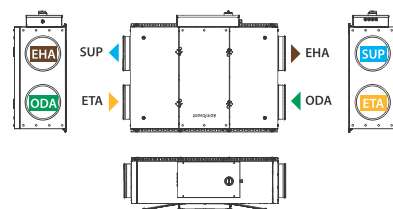

▶ ODA – outdoor intake ▶ SUP – supply air ▶ ETA – extract indoor ▶ EHA – exhaust air